




# FLIR Duo™ Pro


## High-Resolution Thermal and Visible-Light Imager for sUAS.

The new FLIR® Duo™ Pro transforms any airframe into an industrial tool, expanding its value and uses. It is a powerful dual-sensor thermal and visible-light imager designed for a wide range of high-performance commercial, industrial, and public safety drone applications. Featuring thermal and a high-definition 4K color video camera in a single integrated package, Duo Pro gives professional operators the ability to capture actionable thermal and visible data in a single flight.

Beyond its class-leading imaging performance, Duo Pro includes an on-board sensor suite to create a self-contained airborne mapping package. These fully integrated sensors provide an on-board source for all the vital data needed to create accurate maps and 3D models from an airborne platform. By geo-tagging each captured image within the camera Duo Pro eliminates the complexity, data loss, and latency that can come from integrating to external flight control systems.

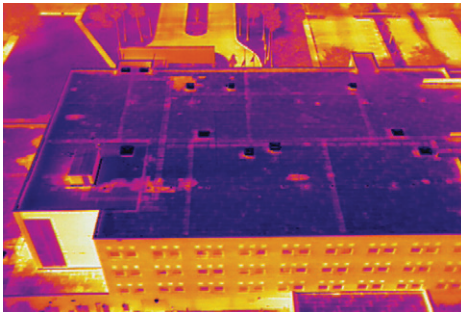

Find problems with buildings like water and insulation damage in roofs.

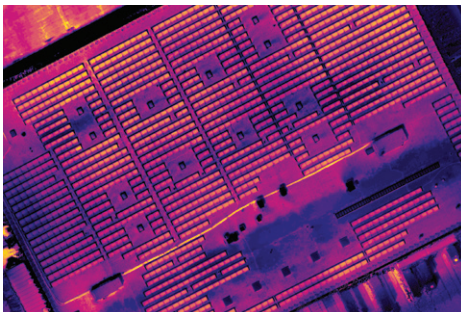

Use the on-board sensor suite to make more accurate orthomosaics of large installations like this solar farm.



Duo Pro is an invaluable tool for fire fighters and other first responders.

### High resolution thermal and 4K visible-light imaging and recording in a rugged, compact package

*Capture video & still imagery in both thermal and visible simultaneously for improved understanding of every scene*

- Airborne dual sensor thermal and video imaging and recording in a single component
- Wide 5-26 VDC power input range
- MSX blending for greater image detail in daylight conditions
- Live digital video output over micro-HDMI

### Fully-integrated thermal and visible airborne mapping system

*Get accurate metadata, including GPS, temperature, and altitude, for every image*

- On-board GPS receiver, IMU, temperature, humidity, and altitude sensors
- Tightly coupled integration ensures the most accurate image geo-tagging possible
- Convenient integration to MAVLink-compatible flight controllers


### Flexible, powerful camera control and configuration options

*Multiple thermal resolution and lens options give you the optimal configuration for your missions*

- Control camera functions with PWM inputs – imagery color palettes, recording start/stop, still image capture, or video streaming switch (thermal, visible, MSX, PIP)
- Configure your camera's recording and control settings over Bluetooth with the FLIR UAS mobile app
- Field-upgradeability make sure you'll always have the latest features

## Specifications

Overview	Duo Pro 640	Duo Pro 336
Thermal Imager	Uncooled VOx Microbolometer	
Spectral Band	7.5 – 13.5 $\mu$ m	
Thermal Sensitivity	< 50 mK	
Thermal Sensor Resolution Options	640 x 512	336 x 256
Thermal Lens Options	13 mm: 45° x 37°	9 mm: 35° x 27°
	19 mm: 32° x 26°	13 mm: 25° x 19°
	25 mm: 25° x 20°	19 mm: 17° x 13°
Thermal Frame Rate	30 Hz	
Visible Sensor Resolution	4000 x 3000	
Visible Camera FOV's	56° x 45°	56° x 45°
<b>Radiometry</b>		
Measurement Accuracy	+/- 5 C or 5% of readings in the -25°C to +135°C range +/- 20 C or 20% of readings in the -40°C to +550°C range	
<b>Physical Attributes</b>		
Size	87 x 82 x 69 mm	
Weight	325 g 375 g (640-25 mm only)	325 g
<b>Image Processing &amp; Display Controls</b>		
Imaging Modes	IR-only, Vis-only, Picture-in-Picture (IR in Vis)	
MSX Image Enhancement?	Yes	
Multiple Color Palettes?	Yes – Adjustable in App and via PWM	
<b>IMU Sensor</b>		
GPS?	Yes (GPS, GLONASS)	
Other Sensors	Accelerometer, Gyroscope, Magnetometer, Barometer	
<b>Interfaces</b>		
USB 3.0	Power in, USB Mass Storage	
10-Pin Accessory Port	Power in, Analog Video Out, PWM, MAVLink, Frame Sync Out	
Micro-HDMI	Digital Video Out	
Input Voltage	5.5 - 26.0 VDC (10-pin JST Port)	
	5.0 VDC (USB-C Port)	
Power Dissipation (avg)	10 W	10 W
Remote Control?	Yes - PWM (3 channels), MAVLink	
MAVLink interface?	Yes	
Digital Video Output	1080p60, 1080p30, 720p60	
Mounting Features	1/4"-20 TPI Tripod Mounts (qty 2, bottom surface)	
<b>Environmental</b>		
Operating Temperature Range	-20°C to +50°C	
Storage Temperature Range	-20°C to +60°C	
Operational Altitude	+38,000 feet	

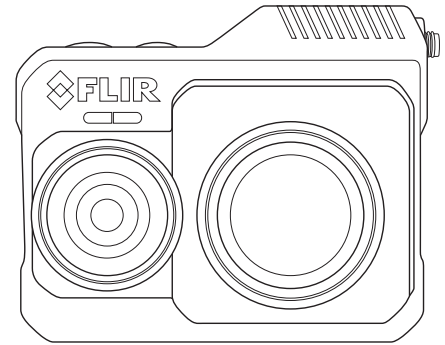

PORTLAND  
Corporate Headquarters  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

FLIR Systems, Inc.  
6769 Hollister Avenue  
Goleta, California 93117  
USA  
PH: +1 201.368.9700

FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 03063  
USA  
PH: +1 866.477.3687

www.flir.com  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. 0817 17-2249