


60 GHz

Noise Figure Test Set

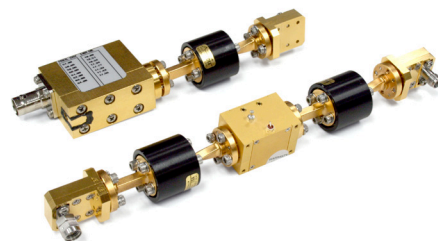

The Noisecom 60 GHz Noise Figure test set has 4 separate systems designed to perform Y-factor noise figure measurements using a high performance Spectrum Analyzer or a dedicated receiver. Each system contains a highly stable V-band noise source, isolator(s), optional waveguide to coaxial transitions and an optional pre-amplifier for use with a spectrum analyzer. The two standard calibration tables have ENR data points at 1 GHz intervals.* System ENR is measured before the DUT connector and at the final output stage allowing for pre-test calibration of the system.

* Additional calibration points are available upon request. Please contact your local sales office.

Specifications

Noise Source


BW	50 GHz to 75 GHz
Power output	17.5 dB ENR
Flatness	± 2.5 dB
Power input	28 V, BNC connector

Amplification

BW	57 GHz to 64 GHz
Power	30 dB of Gain
Final output Flatness	±3 dB
Power input	12V, 160 mA, two solder lugs

Isolation

25 dB of isolation @ 60 GHz

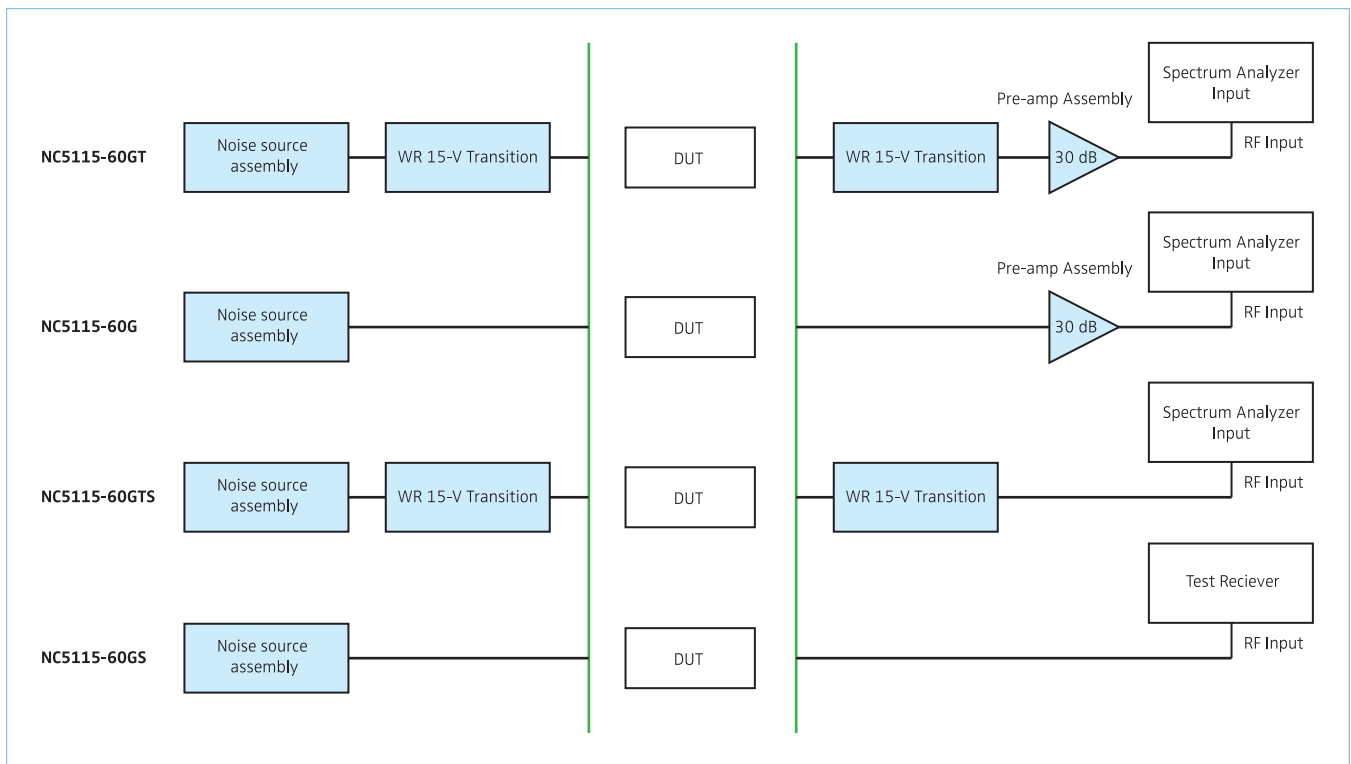

System Block Diagram

The above diagram illustrates all four Noise Figure system possibilities. If measuring on a wafer, the isolator waveguide is connected directly to the probe station. When connecting to an external LNA/receiver assembly via coaxial cable, WR15 – V transitions are available. The 60GTS system is for testing a fully assembled receiver circuit with enough output power to connect directly to the spectrum analyzer coaxially. The 60GS system allows for waveguide connection to a dedicated test receiver.

Options

NC5115-60G	Calibrated Noise figure Test set with LNA and WR15 (m) waveguide
NC5115-60GT	Calibrated Noise figure Test set with LNA and VT-085 1.85 mm coax transition
NC5115-60GS	Calibrated Noise figure Test set WR15 (m) waveguide
NC5115-60GTS	Calibrated Noise figure Test set VT-085 1.85 mm coax transition

Wireless Telecom Group Inc.
25 Eastmans Rd
Parsippany, NJ 07054

Sales Offices
Parsippany, NJ
United States
Tel: +1 973 386 9696
Fax: +1 973 386 9191
www.noisecom.com

Cheadle Hulme, Cheshire
United Kingdom
Tel: +44 (0) 161 486 3353
Fax: +44 (0) 161 486 3354

Roissy
France
Tel: +33 (0) 1 72 02 30 30
Fax: +33 (0) 1 49 38 01 06

Ismaning
Germany
Tel: +49 (0) 89 996 41 0
Fax: +49 (0) 89 996 41 440

Singapore
Tel: +65 6827 9670
Fax: +65 6827 9601

Shanghai
China
Tel: +86 21 5835 5718
Fax: +86 21 5835 5238

© Copyright 2009
All rights reserved.

NC/60GHzNF/0509/EN
Note: Specifications, terms and conditions are subject to change without prior notice.