


Average Throughput

1 Second Throughput

| | | |
|-------------|-----------------|-------------|
| All Devices | 56,618 Bits/Sec | 16 Bits/Sec |
| Master | 28,324 Bits/Sec | 0 Bits/Sec |
| Slaves | 28,294 Bits/Sec | 16 Bits/Sec |

Packet Type:


- ACL
- SCO
- eSCO
- LMP
- FHS
- Null
- Poll
- Filler
- Status:
- Retransmitted
- Decode Error
- Header Error
- Payload/CRC Error
- Discontinuity

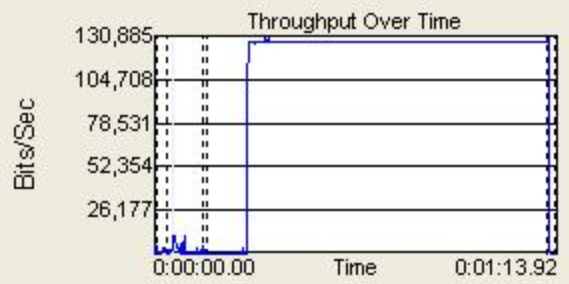

Swap

- Show Running Ave
- Show slave LT_AD

Selected Packet: None

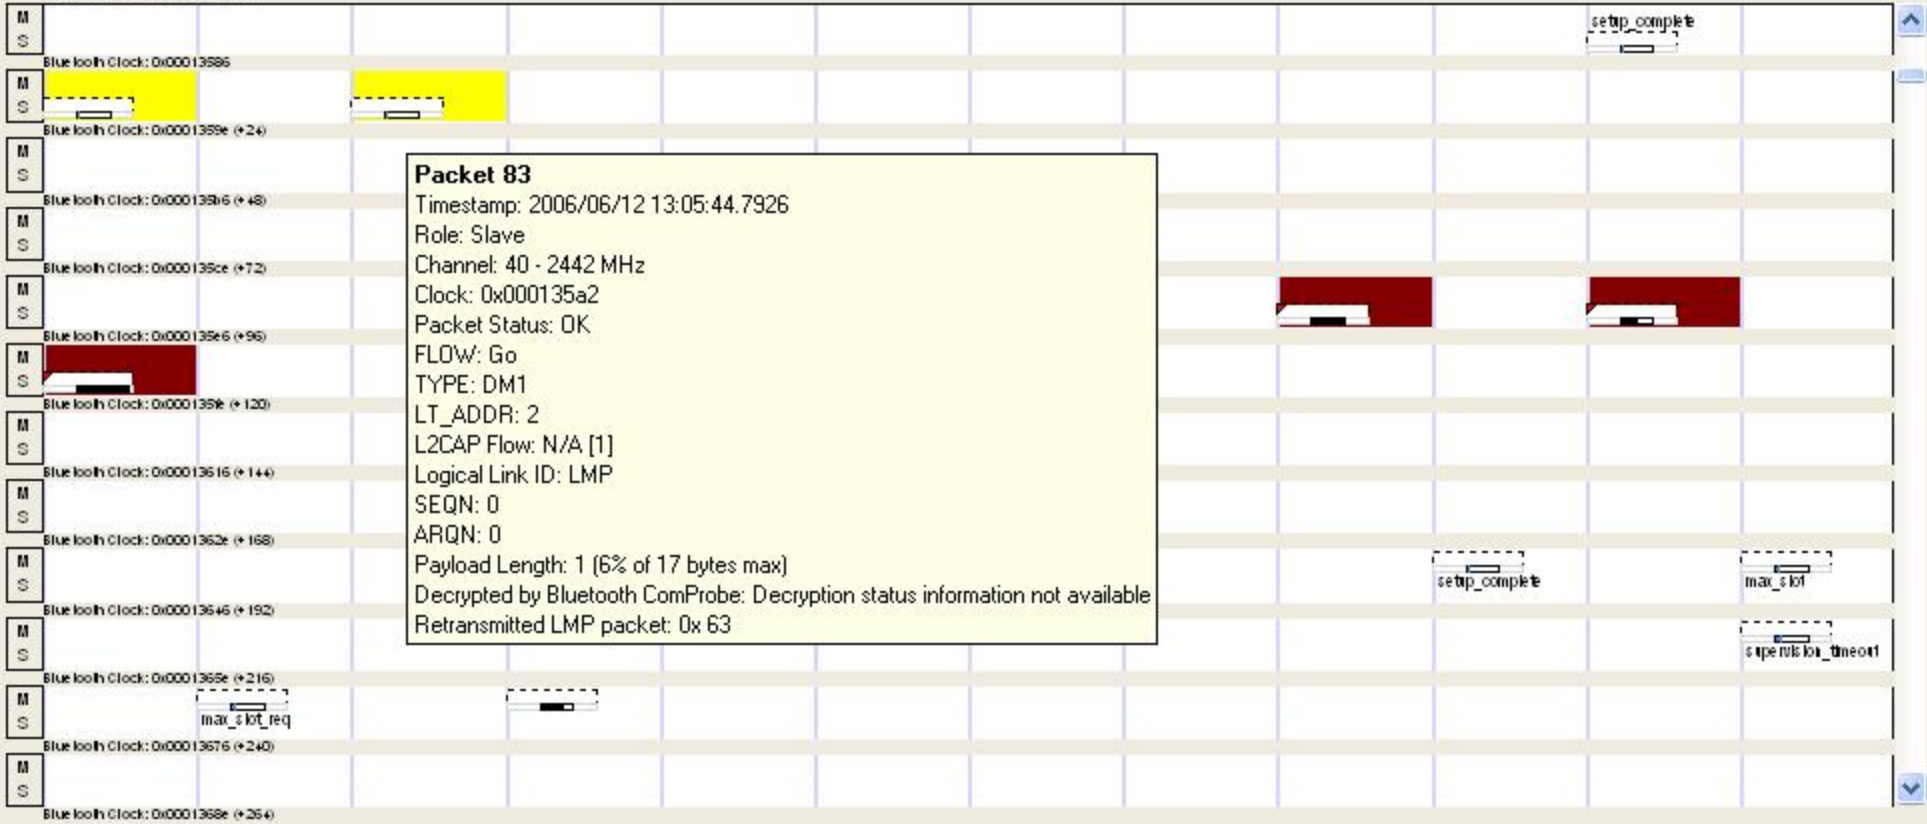

Packet 83
 Timestamp: 2006/06/12 13:05:44.7926
 Role: Slave
 Channel: 40 - 2442 MHz
 Clock: 0x000135a2
 Packet Status: OK
 FLOW: Go
 TYPE: DM1
 LT_ADDR: 2
 L2CAP Flow: N/A [1]
 Logical Link ID: LMP
 SEQN: 0
 ARQN: 0
 Payload Length: 1 (6% of 17 bytes max)
 Decrypted by Bluetooth ComProbe: Decryption status information not available
 Retransmitted LMP packet: 0x 63

Time